


PL-PANEL-C1050-FLX

PL-WIRE-FLXC1050-EN-V3

Internal Electrical Wiring Diagram

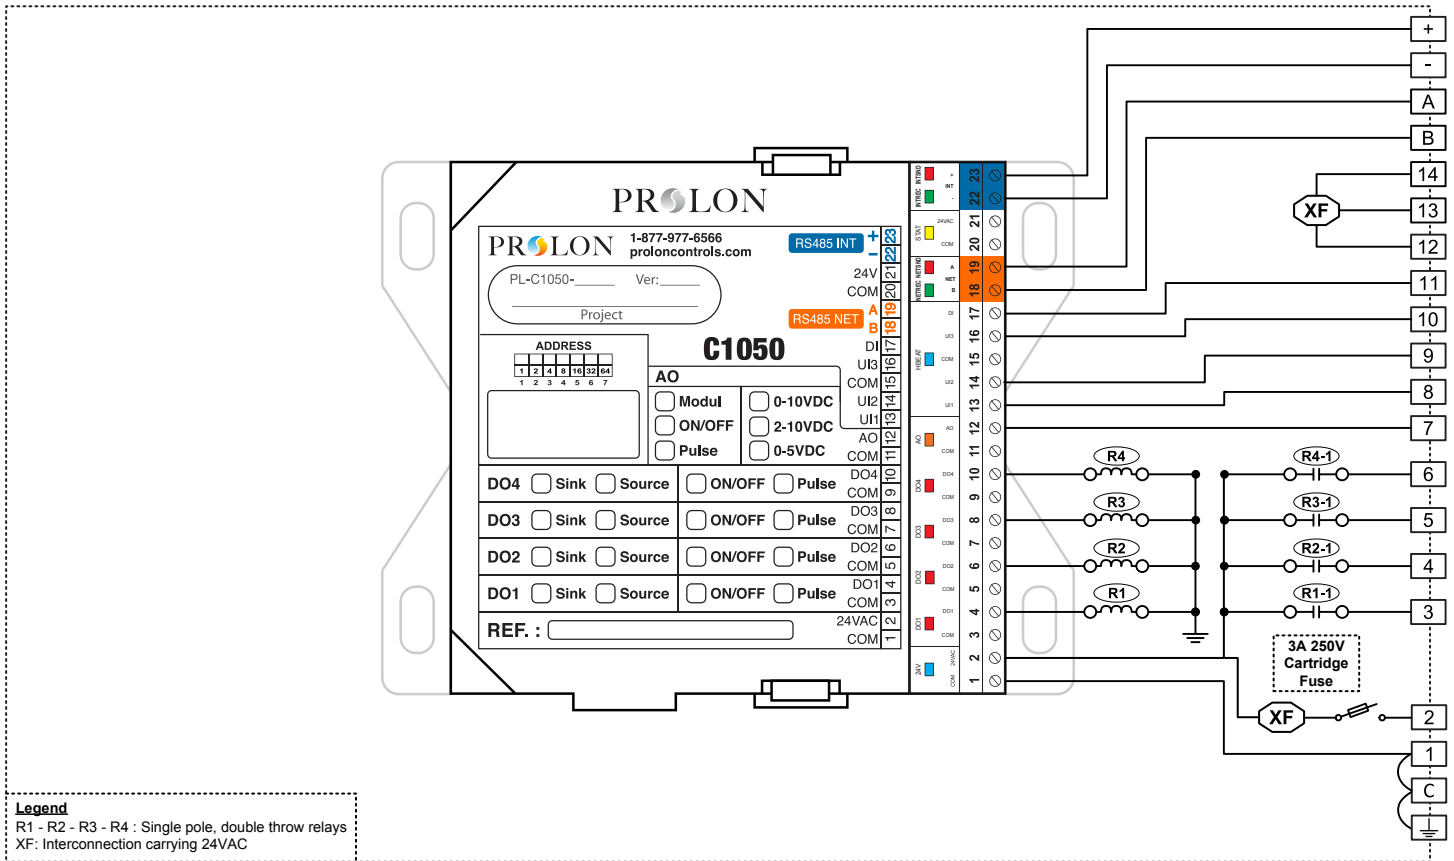

Field Wiring Details

ALL TERMINALS: Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm

Terminal	Function	Ratings
	GROUND	N/A
1	Power Supply Input Common	N/A
2	Power Supply Input 24VAC	24VAC, 3A, 60Hz
3	Digital Output 1	24VAC, 300mA
4	Digital Output 2	24VAC, 300mA
5	Digital Output 3	24VAC, 300mA
6	Digital Output 4	24VAC, 300mA
7	Analog Output 1	0-10VDC, 40mA
8	Universal Input 1	N/A
9	Universal Input 2	N/A
10	Universal Input 3	N/A

Terminal	Function	Ratings
11	Digital Input (Dry Contact)	N/A
12	Power Supply 24VAC	24VAC, 3A, 60Hz
13	Power Supply 24VAC	24VAC, 3A, 60Hz
14	Power Supply 24VAC	24VAC, 3A, 60Hz
+	C1050 RS485 INT A (+)	N/A
-	C1050 RS485 INT B (-)	N/A
A	C1050 RS485 NET A (+)	N/A
B	C1050 RS485 NET B (-)	N/A
C	COMMON	N/A
XF	24VAC Supply	24VAC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

PROLON

www.proloncontrols.com

1-877-9PROLON

info@proloncontrols.com