




PL-RM-RH – Room Humidity Transmitter




Product Description

The PL-RM-RH series room humidity transmitter uses a highly accurate and field-proven RH sensor in an attractive low profile enclosure to monitor room relative humidity levels. The RH output can be field selected as a linear 4-20 mA or 0-5 / 0-10 Vdc signal.

Typical Installation

The PL-RM-RH can be mounted directly to a single gang electrical box or directly to a wall. Multiple mounting holes are provided for connection to a variety of electrical boxes.


A terminal block connection is provided for connection to the ProLon Building Automation System.

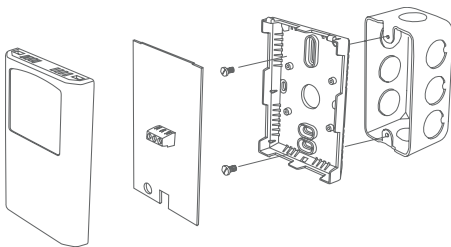

Technical Specifications

SENSOR	Thermoset polymer based capacitive
ACCURACY	±5 %RH (5 to 95 %RH)
RANGE	0 to 100 %RH
RESOLUTION	0.01 %RH
HYSTERESIS	±0.8 %RH @ 25°C (77°F)
RESPONSE TIME	8 seconds typical
STABILITY	<0.25 %RH/year
POWER SUPPLY	24 Vac/dc ±10% typical, 28 Vac/dc maximum
CONSUMPTION	20 mA @ 24 Vdc
SIGNAL	4-20 mA / 0-5 or - 0-10 Vdc (field selectable)
OUTPUT DRIVE @ 24 VDC	Current: 550 Ω maximum Voltage: 10,000 Ω minimum
OPERATING CONDITIONS	32 to 122°F (0 to 50°C)
ENCLOSURE	White ABS, UL94-v0, IP30 (NEMA 1) 3.3" x 4.7" x 1.15" (84mm W x 119mm H x 29mm D)
WIRING CONNECTIONS	Screw terminal block (14 to 22 AWG)
COUNTRY OF ORIGIN	Canada

Wiring Information

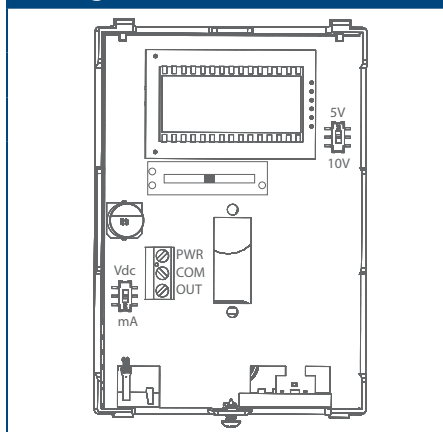

Terminal

Function

PWR	+ 24 Vdc/ac Input
COM	COMMON
OUT	Analog Output

